






**DERBIGUM®**  
MAKING BUILDINGS SMART

# Installation Guide for Perlok 150 Fascia (For Built Up Roofs)

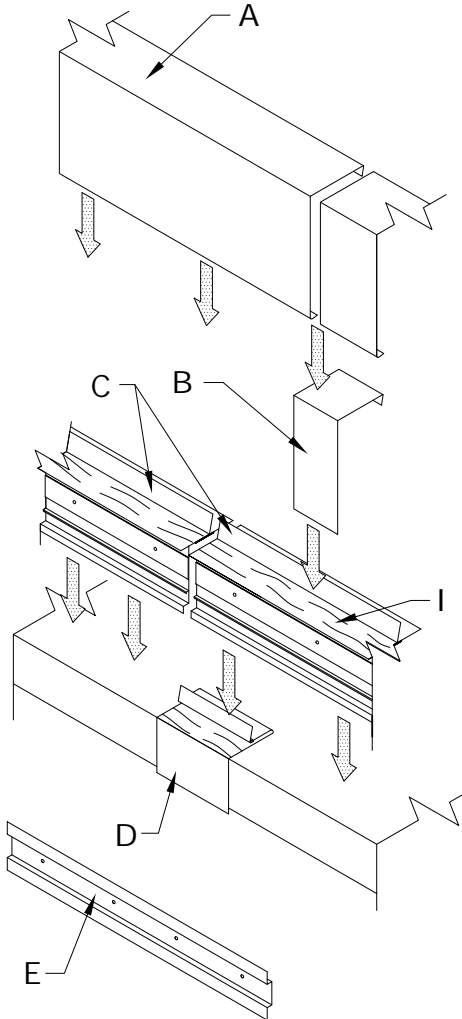

- A. Fascia Cover  
10'-0" Lengths
- B. Concealed Joint Splice  
4" Lengths
- C. Extruded Retainer  
10'-0" Lengths
- D. Retainer Splice With Gasket  
6" Lengths
- E. Retainer Extender  
10'-0" Lengths

NOTES:  
#1 - Isolate all metal parts from ACQ treated wood or other galvanically incompatible material with appropriate membrane material.  
#2 - Appliance attachments, such as lightning rods, signs, or antennae that penetrate the water seal, induce a galvanic reaction, or otherwise compromise the effectiveness of the roof edge system, shall be eliminated or isolated to prevent problems per section 8.0 of ANSI/SPRI ES-1. It is recommended that appliances be isolated from or not attached to the roof edge system. Consult the lightning protection system manufacturer for specific attachment instructions.

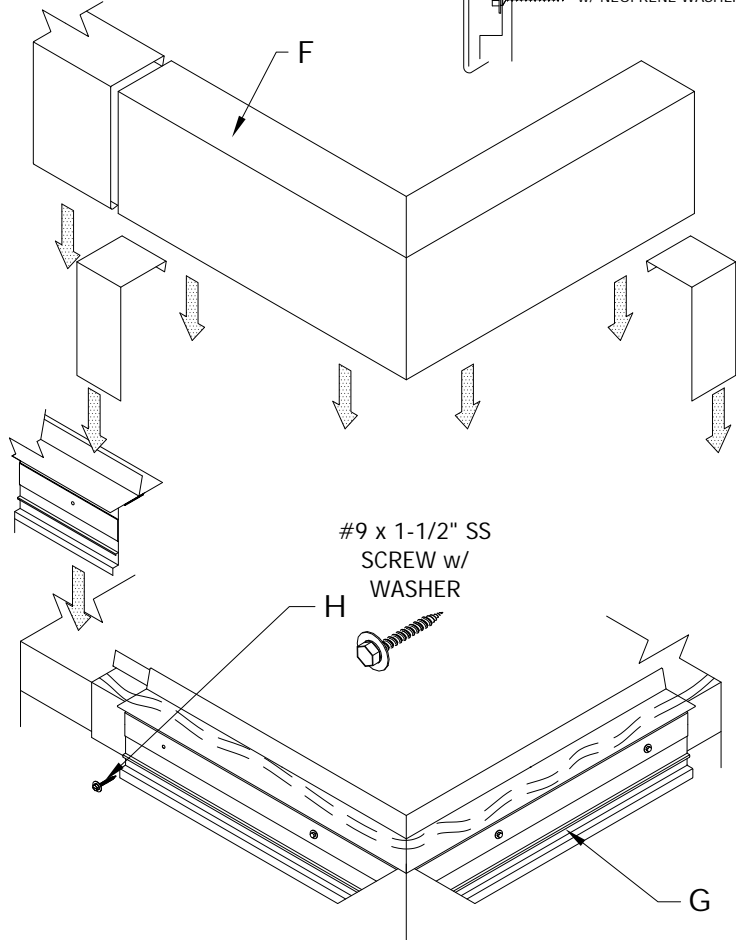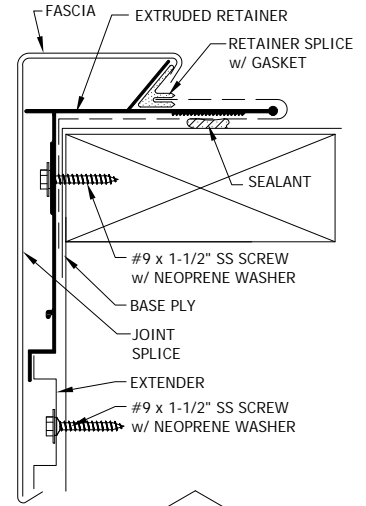


- F. Fascia Miter Cover  
(Outside Corner Shown)
- G. Extruded Retainer Corner  
(Outside Corner Shown)
- H. #9 x 1-1/2" SS Screw w/ Neoprene Washer  
at 12" o.c. (6" from ends)  
(Provided & Required by Manufacturer)
- I. Non-Hardening Sealant  
Continuous Bead of Sealant  
(By Installer)

DERBIGUM Performance Roof Systems  
4800 Blue Parkway - Kansas City, MO. 64130 - Phone: (800) 727-9872 - Fax: (816) 921-5007  
Email: info@derbigum.com - www.derbigum.com




**DERBIGUM®**  
MAKING BUILDINGS SMART

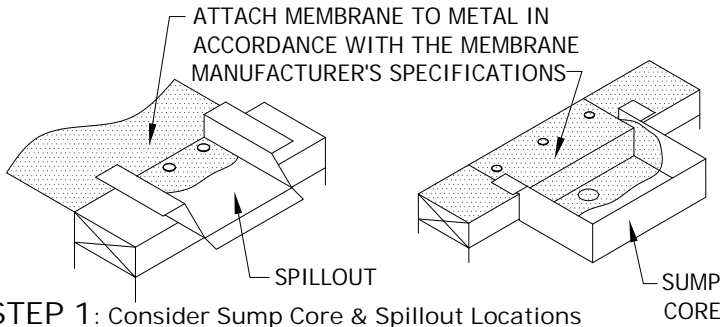


### STEP 1: Consider Sump Core & Spillout Locations

Locate sump cores where downspouts will be located. Sumps are installed prior to the retainer. The retainer butts up to side(s) of sump core. Spillouts are installed along with the fascia lengths as required. Refer to "Spillout & Sump Core Install Guides" for more info on installation if necessary.

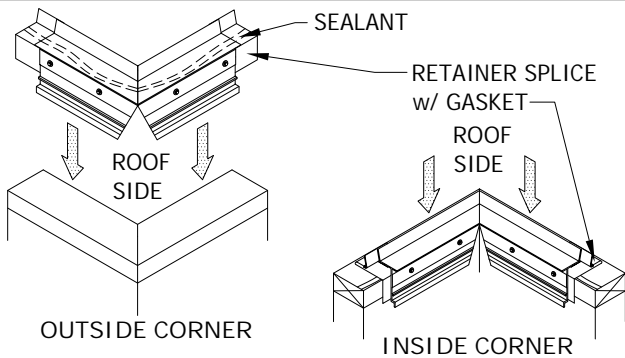


### STEP 2: Installing Retainer Miters

Locate retainer miter for each corner. Apply a continuous bead of the roofing manufacturer's sealant to the bottom side of the retainer miter. Locate a retainer splice onto each end of the retainer miter. Place two screws (provided by manufacturer) in each side of the corner support.

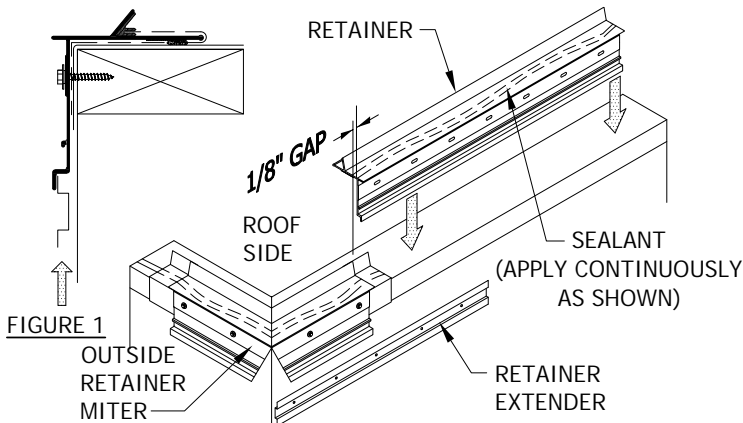


### STEP 3: Installing Retainer & Retainer Extender

Apply a continuous bead of the roofing manufacturer's sealant to the bottom side of the retainer (see first page for detail view). Set the retainer onto the roof edge over membrane; install a retainer splice on end opposite of retainer miter. Attach retainer using mechanical screw fasteners (provided by manufacturer). Locate fasteners in each of the pre-punched holes. Allow 1/8" gap between the retainer sections for thermal expansion (1/4" if temperature is below 40°F). Starting at corners, slide the extender under the retainer and pull up tight (see figure 1). Attach using mechanical fasteners (provided by manufacturer). Install a fastener in each pre-punched hole.

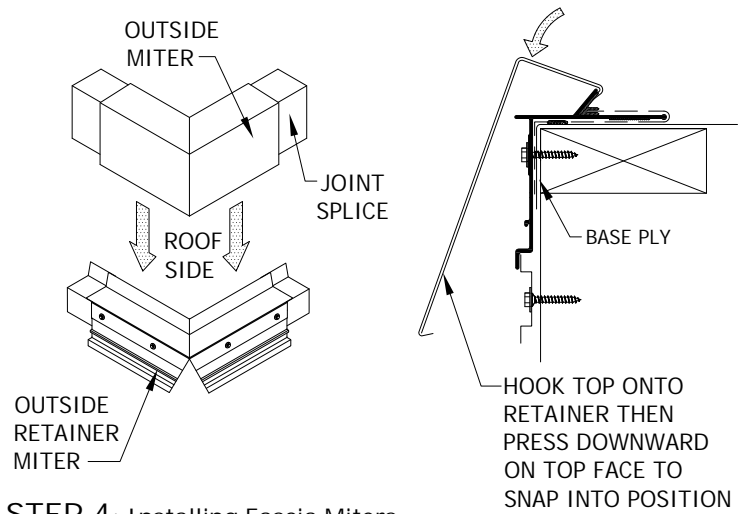


### STEP 4: Installing Fascia Miters

Locate concealed joint splices in both ends of each fascia miter (as shown). Leave approximately 1/2 of the joint splice extending past the end of the miter leg. With splices inside of miter, hook the top flange of the miter onto the top flange of the retainer to engage the top. Once the top of the miter has been engaged to the top of the retainer, rotate the fascia outward towards the outside of the building and press down on the top flange of the fascia to snap the bottom hook onto the bottom of the retainer extender. Make sure that the hook of the fascia has fully engaged onto the retainer extender.

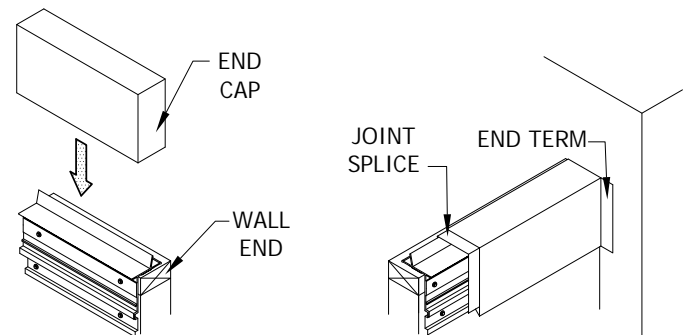

### STEP 5: Installing Fascia End Caps and End Terms

Install end caps and end terms by hooking top and pressing top face downward to snap fascia into place (refer to STEP 4).

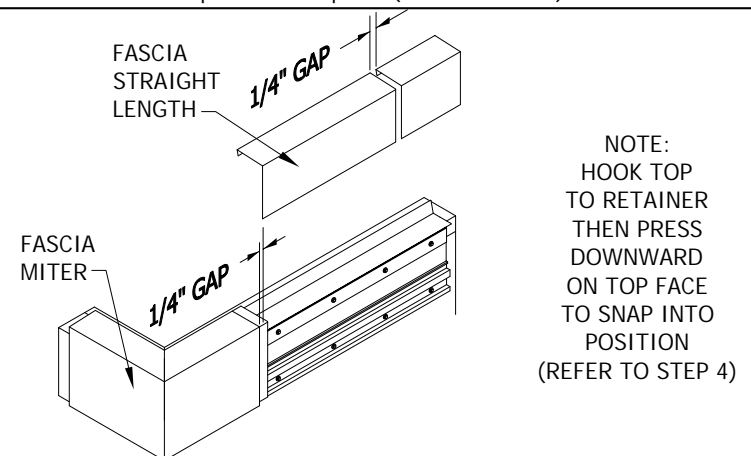

### STEP 6: Installing Fascia Straight Lengths

Place a concealed joint splice in the opposite end of the installed miter or end cap. Install the fascia by hooking top and pressing top face downward to snap fascia into place. Allow 1/4" gap between the fascia sections for thermal expansion. Lengths of all straight pieces should be considered prior to cutting to avoid creating relatively short sections of fascia adjacent to full length sections. Note: There should be a joint splice at every joint.